












EV BLOCKS.COM

B800D EV BLOCK - DATA SHEET

- Pre-Cast Concrete EV charger base with a universal adaptor plate
- Blocks can be fitted for future-proofing an installation
- Uniform finish every time
- 100% Recyclable
- Can be installed in any weather conditions
- Made with 35% reduced carbon concrete



 LENGTH	800mm	 BLOCK WEIGHT	650kg
 WIDTH	800mm	 PLATE WEIGHT	8kg
 HEIGHT	600mm	 EV BLOCK TOTAL WEIGHT	658kg

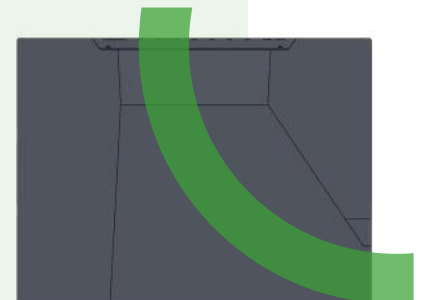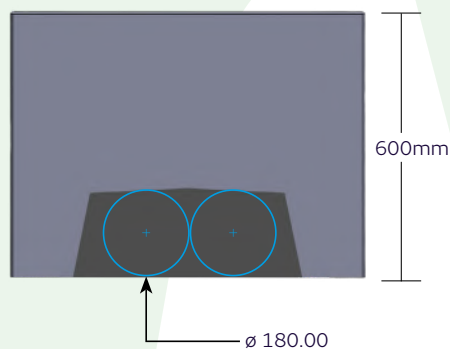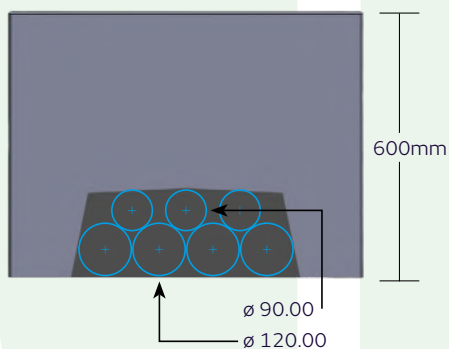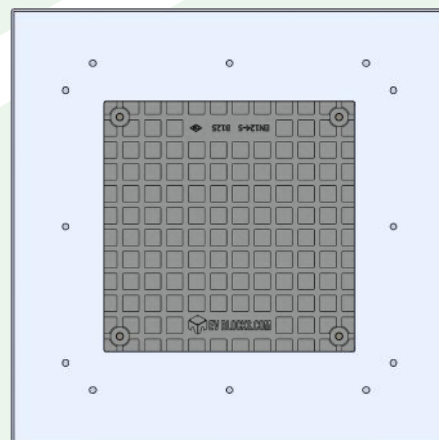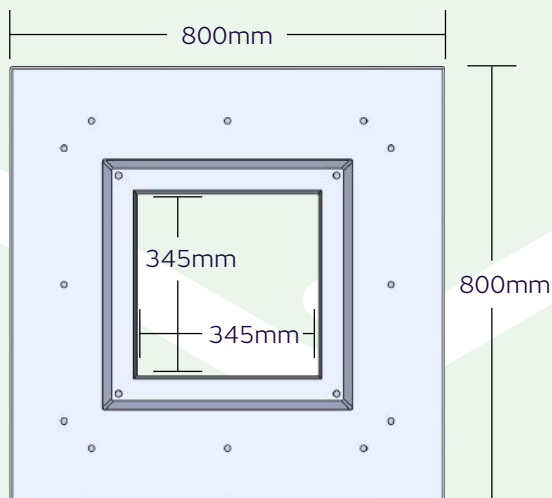



EV BLOCKS.COM

LIFTING GUIDE

The purpose of this document is to provide clear instructions regarding the correct lifting procedures for the loading, unloading, transportation and installation of the B800D EV Block.

Products should be kept on the transportation pallet and moved as close to the installation location as possible prior to any lifting via the 3 lifting points on the top face of the product.

Please note that failure to use the specified lifting procedures increases the risk of product failure or damage. In the case of incorrect lifting equipment or lifting techniques being used, EV Blocks Ltd is not liable to replace products nor compensate for any damages or costs incurred.

Lifting the product into the excavation, we recommend using 3 x suitably rated M12 lifting loops with and RD thread, with a minimum capacity of 500KG. The lifting loops can then be used with suitably rated lifting slings that will need to have a minimum length of 1000mm from the lifting loop to the lifting point. Shown in the picture below -

If you observe any visible signs of damage around any of the lifting points, the products must not be lifted. Please contact us immediately for further assistance.

The lifting loops should be installed in the locations highlighted below -

Best practices


To achieve the best results while maintaining all safety precautions during the lifting of heavy products, all lifting equipment and machinery should be tested and tagged on a regular basis, at least once a year.

Staff members who are operating cranes or other lifting equipment must always remain aware of safe operating procedures. For example, no individual or object should ever be directly underneath a product that is being lifted.


If a staff member acting as a banks person needs to guide a product, this can be done by attaching a rope to the product, allowing the banks person to maintain a safe distance away from the suspended product.

Bases to be placed on competent ground capable of achieving a bearing capacity of 95kn/m².

Any soft spots must be removed and replaced with well compacted granular fill. In poor ground, the base may require a slab to distribute loads.

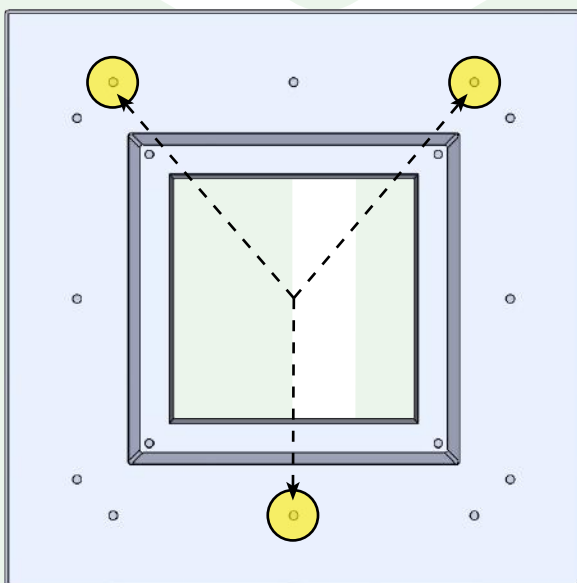

Lifting points shown above

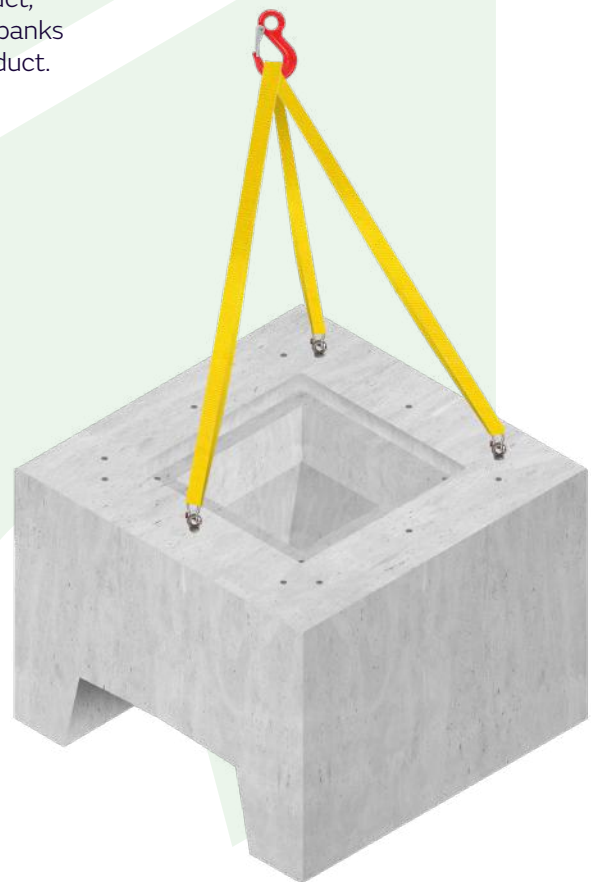



Minimum Strap length - 1000mm



EV BLOCKS.COM



B800D EV BLOCK - ABB 175


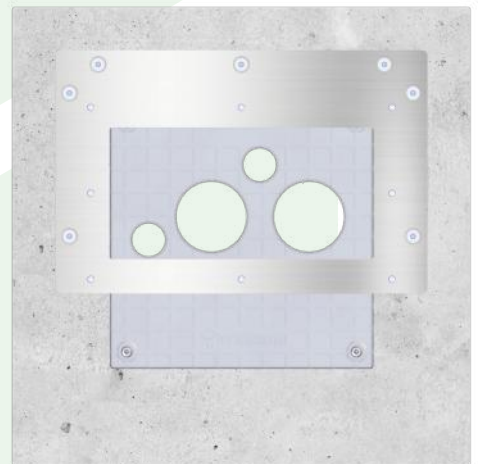
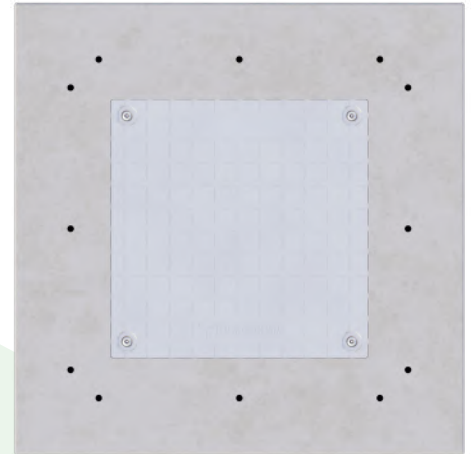




EV BLOCKS.COM



B800D EV BLOCK - ABB 184

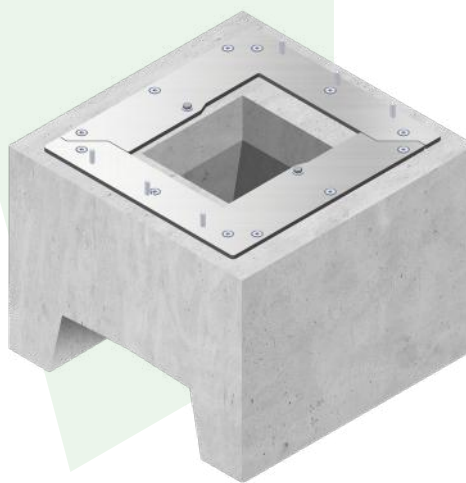
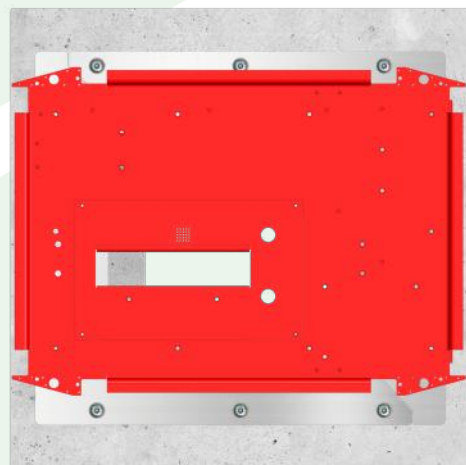
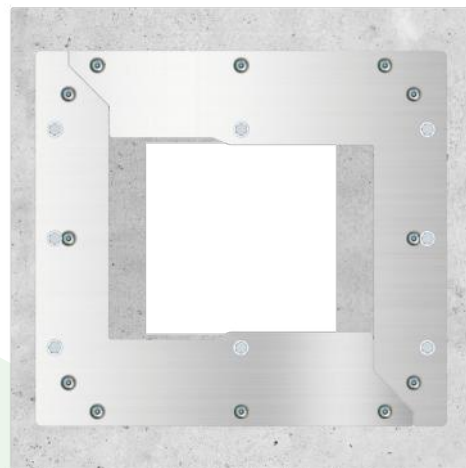




EV BLOCKS.COM



ABB TERA 54


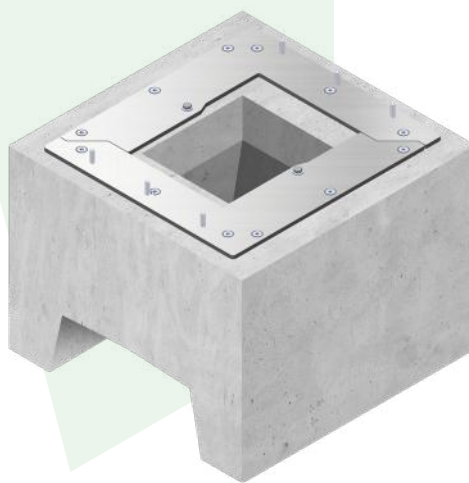
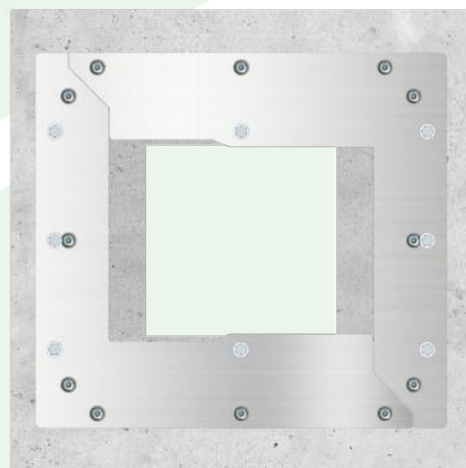
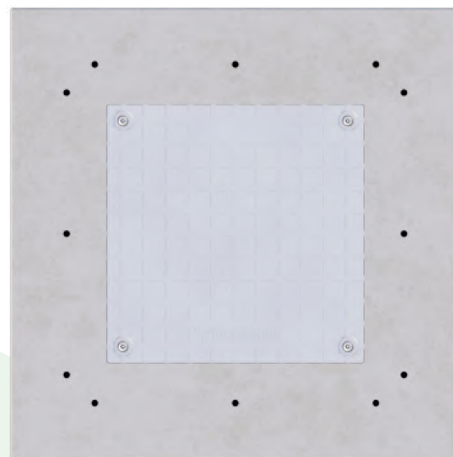




EV BLOCKS.COM



B800D EV BLOCK - ABB TERRA 360

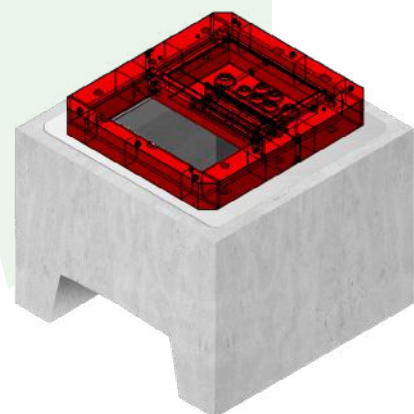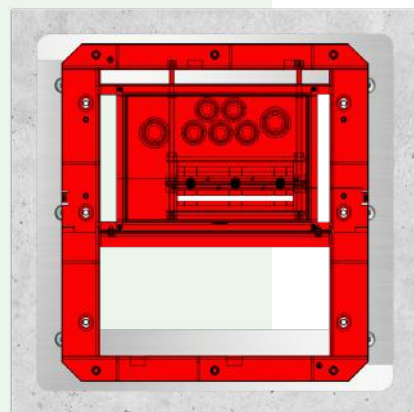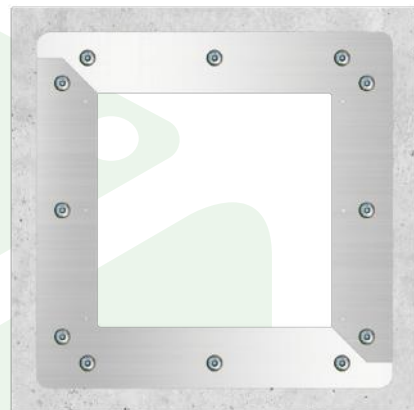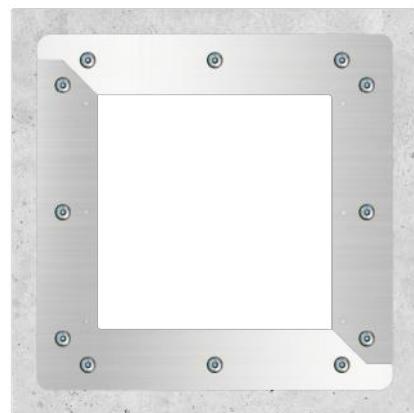






EV BLOCKS.COM



KEMPOWER

B800D EV BLOCK - KEMPOWER 400 KW LIQUID COOLED

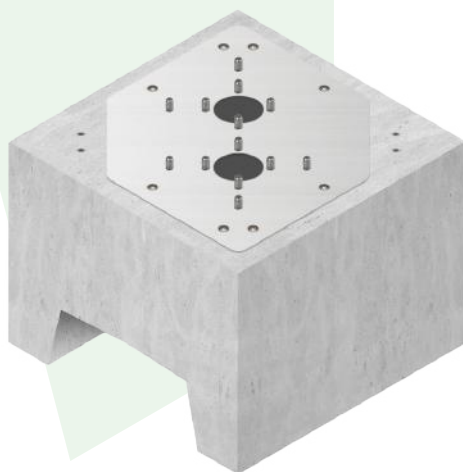
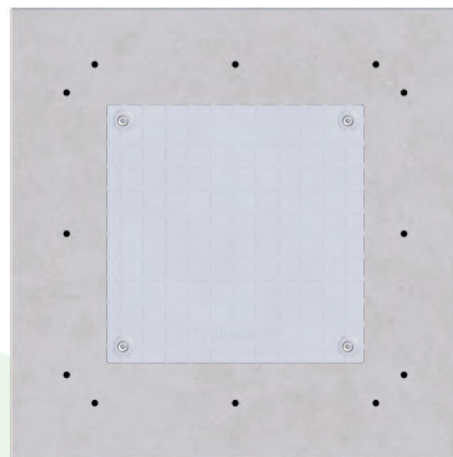
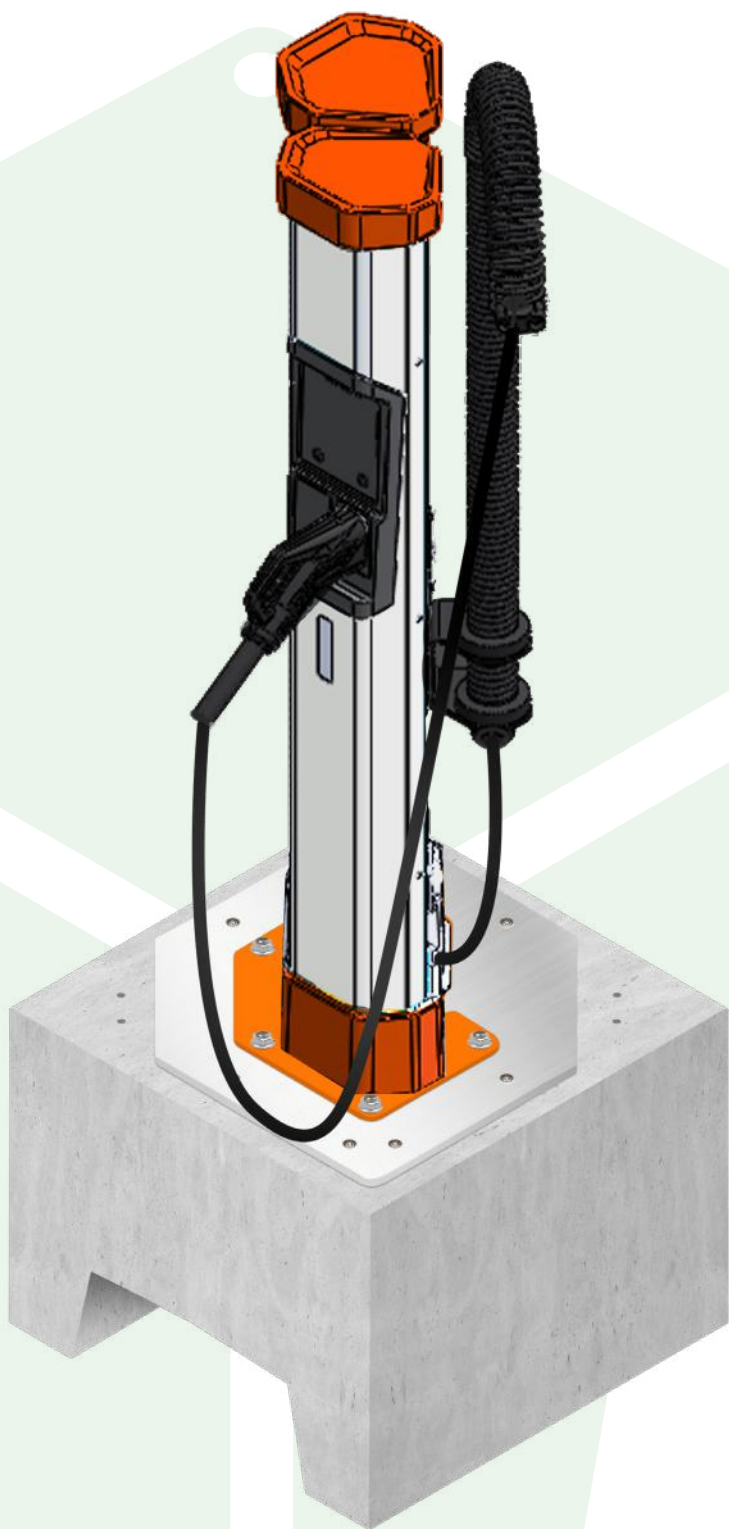




EV BLOCKS.COM



KEMPOWER C501 AND C801

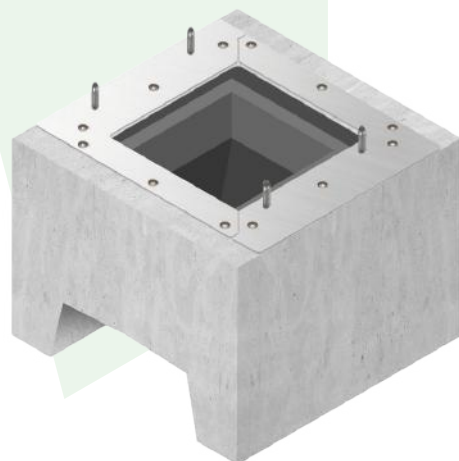
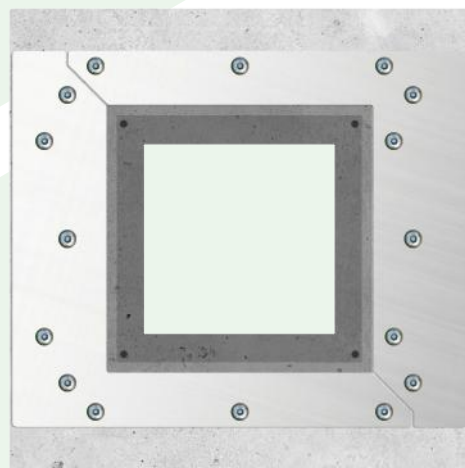
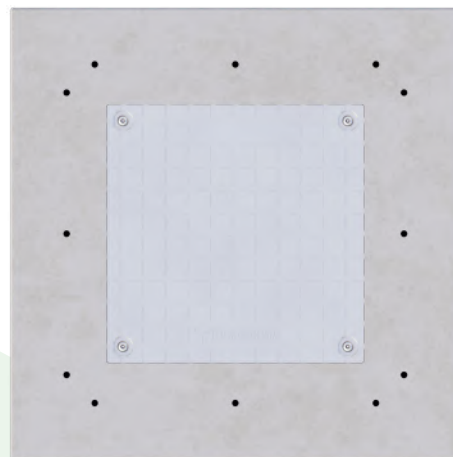




EV BLOCKS.COM



ALPITRONIC HYC 150

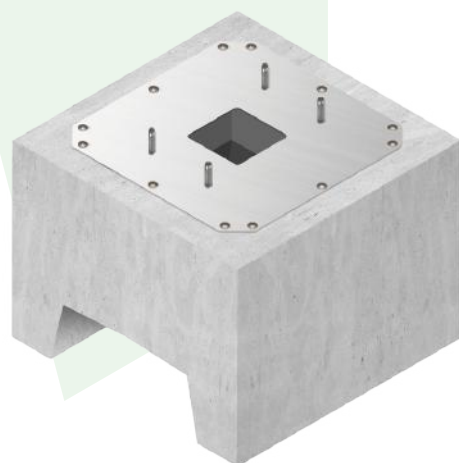
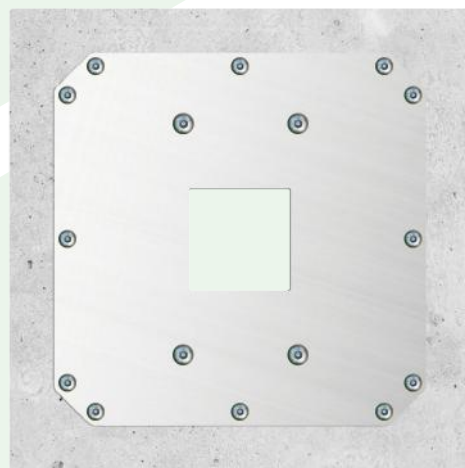
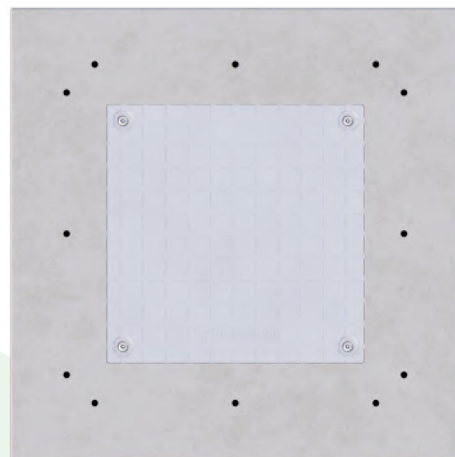




EV BLOCKS.COM



B800D EV BLOCK - ALPITRONIC HYC 200

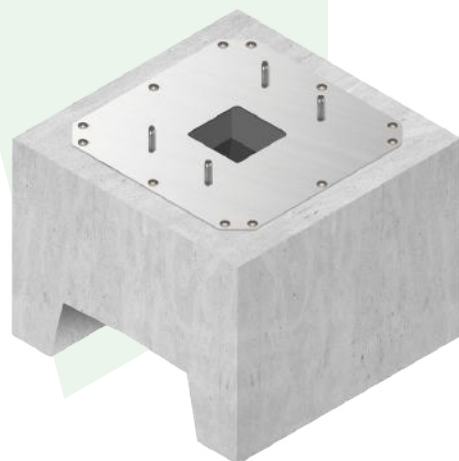
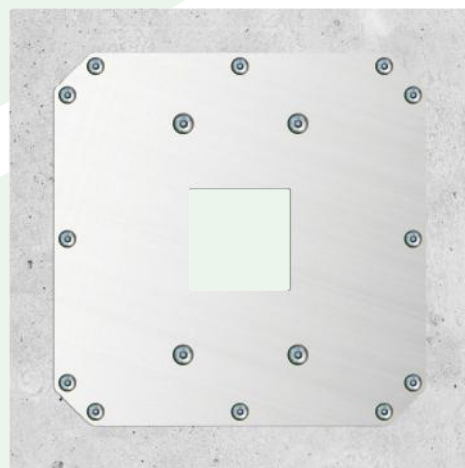
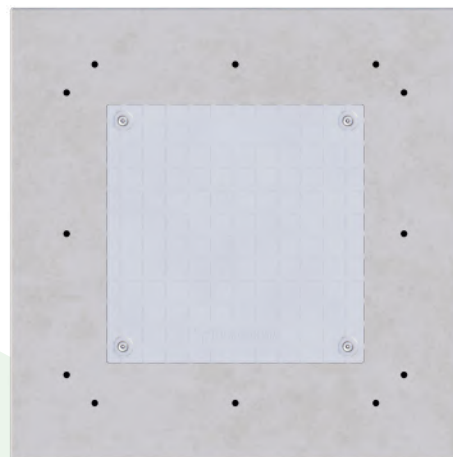




EV BLOCKS.COM



ALPITRONIC HYC 300

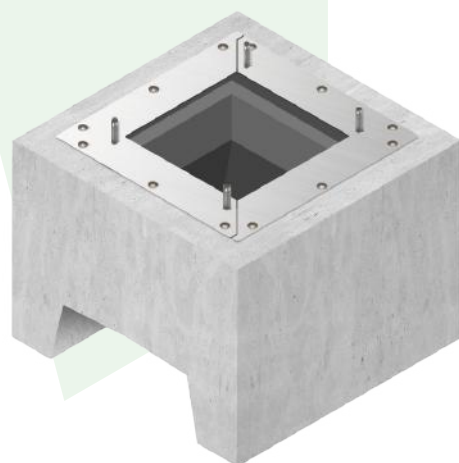
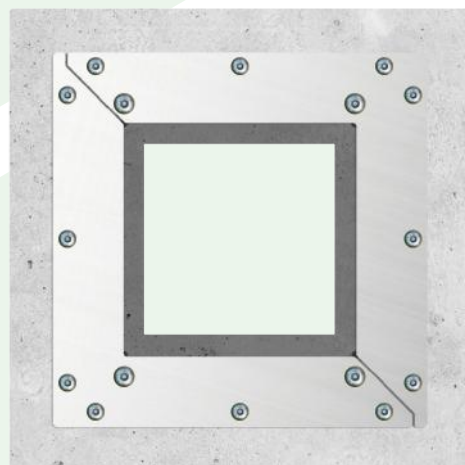
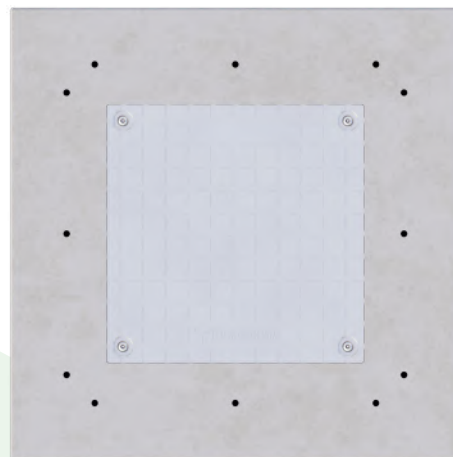




EV BLOCKS.COM

alpitronic

B800D EV BLOCK - ALPITRONIC HYC 400

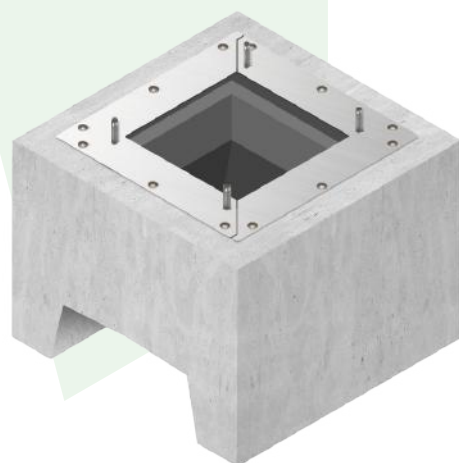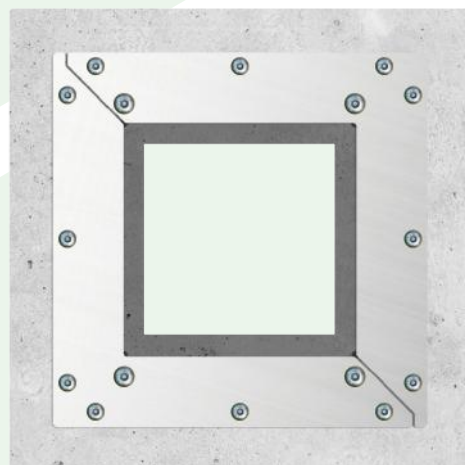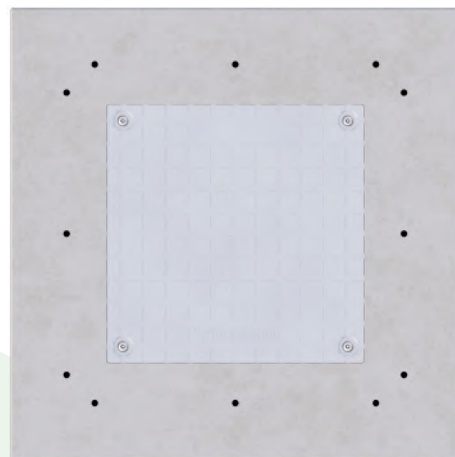




EV BLOCKS.COM



TRITIUM

B800D EV BLOCK - TRITIUM RTM RANGE



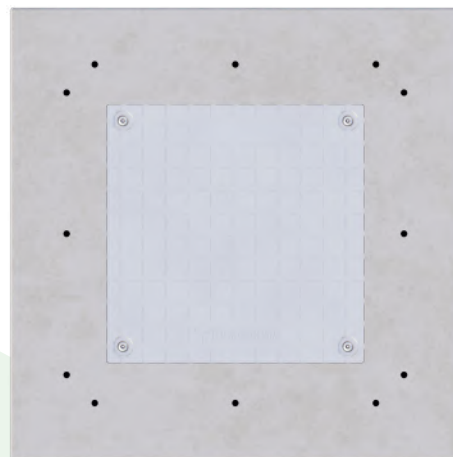




EV BLOCKS.COM

ROLEC**EV**

B800D EV BLOCK - ROLEC - ULTRA CHARGER

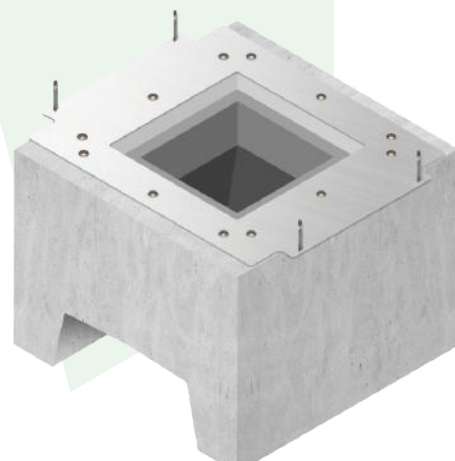
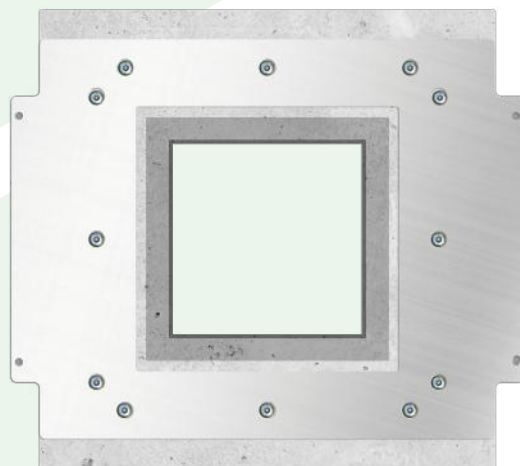
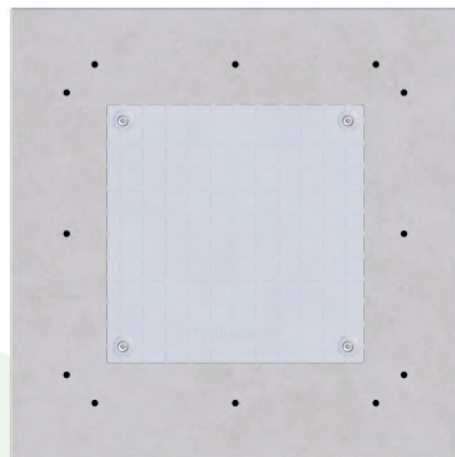




EV BLOCKS.COM

AUTEL®

B800D EV BLOCK - AUTEL DC HIPOWER

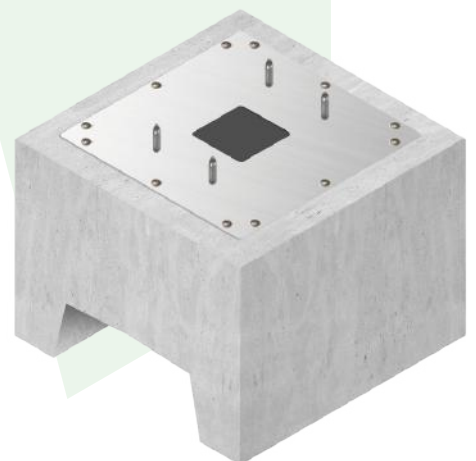
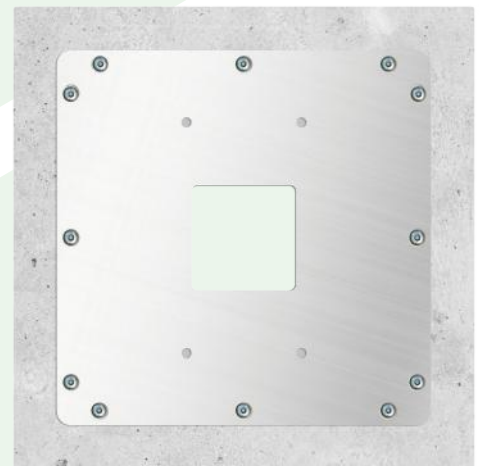
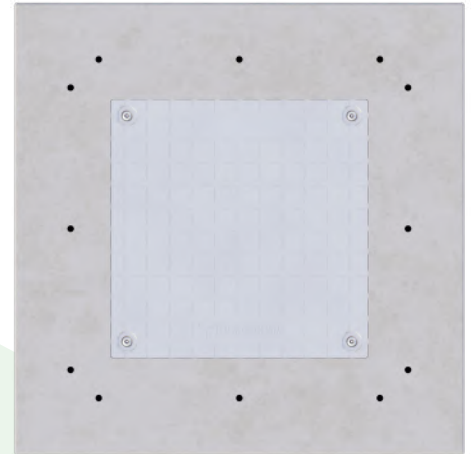




EV BLOCKS.COM

AUTEL®

B800D EV BLOCK - AUTEL DC FAST 60-240KW

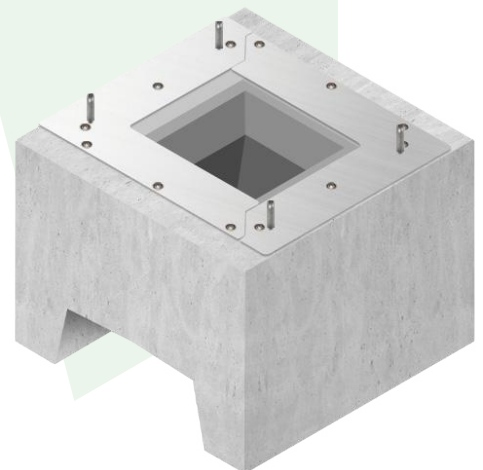
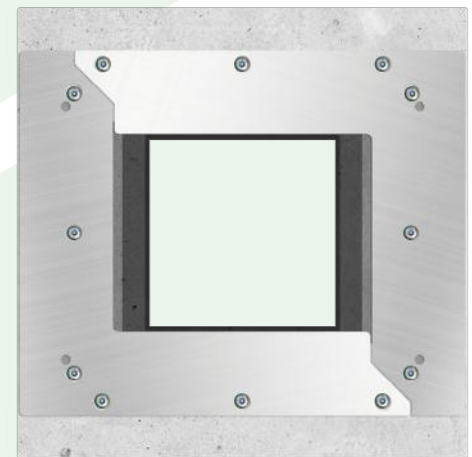
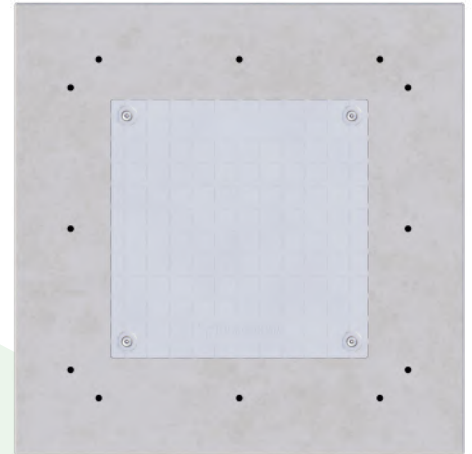




EV BLOCKS.COM



B800D EV BLOCK - POWER ELECTRONICS NB120

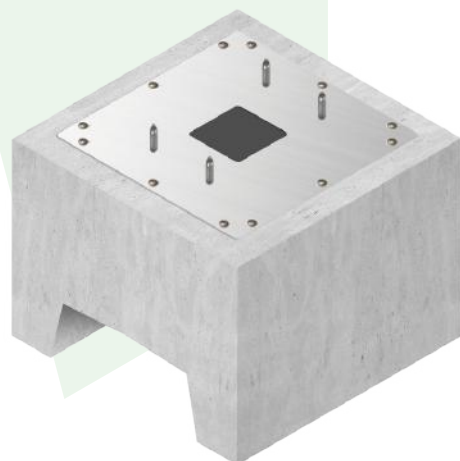
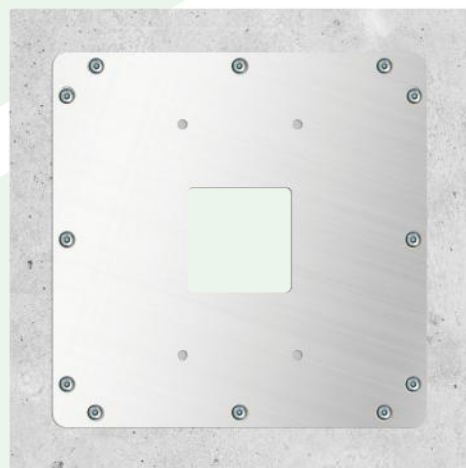
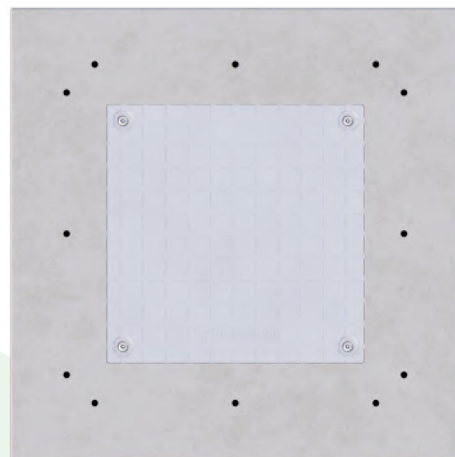




EV BLOCKS.COM



B800D EV BLOCK - POWER ELECTRONICS NB 240

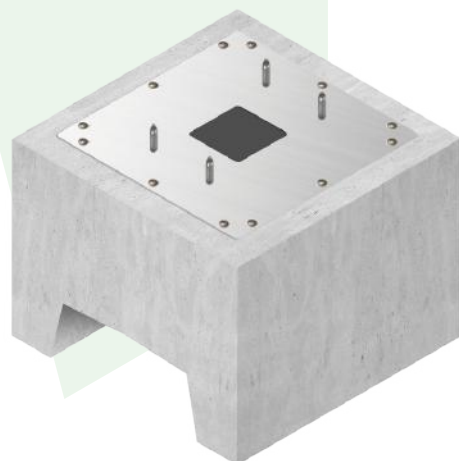
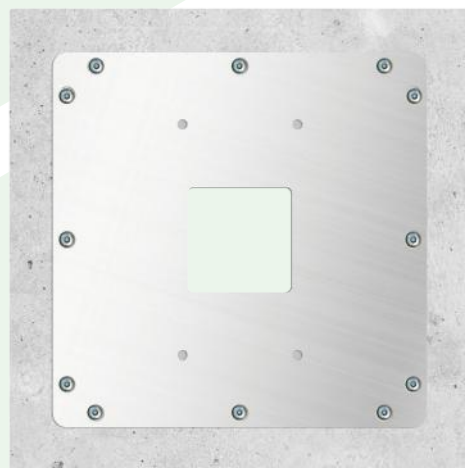
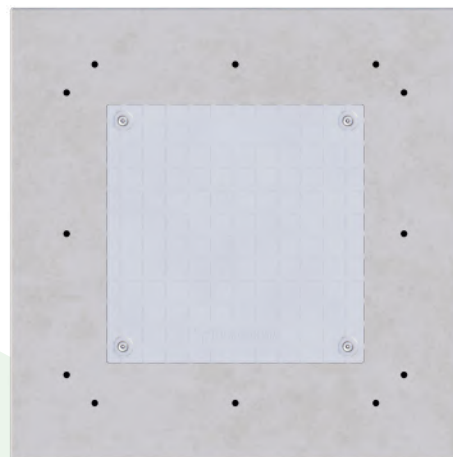




EV BLOCKS.COM



B800D EV BLOCK - POWER ELECTRONICS NB 400

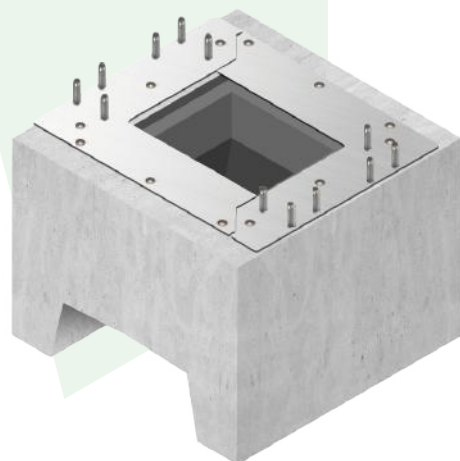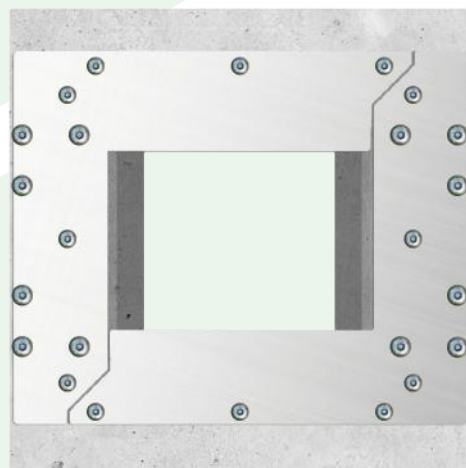
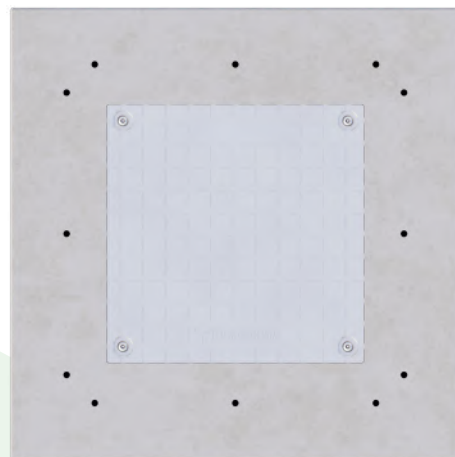




EV BLOCKS.COM

i-charging

B800D EV BLOCK - I-CHARGING BLUEBERRY PLUS


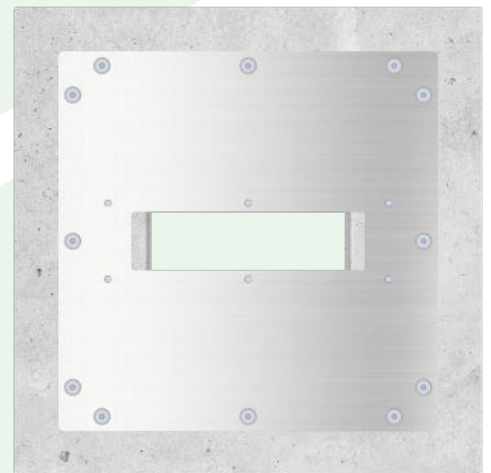
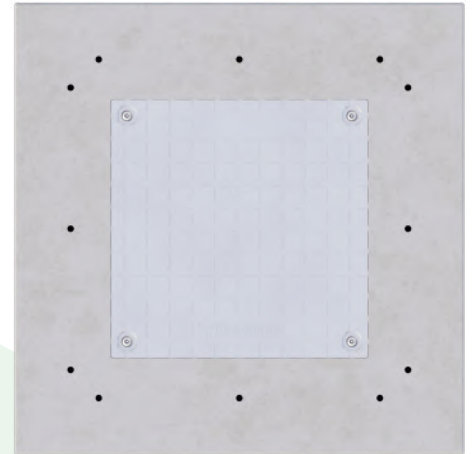




EV BLOCKS.COM

SIEMENS

B800D EV BLOCK - SIEMENS SICHARGE D

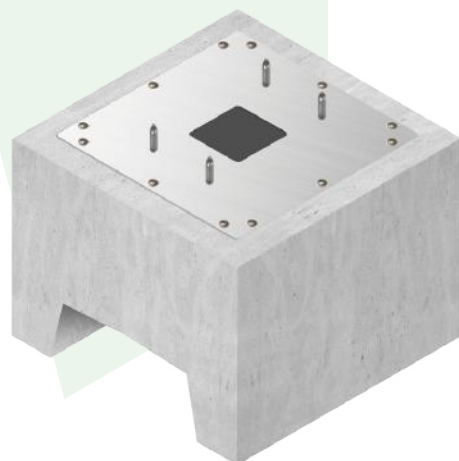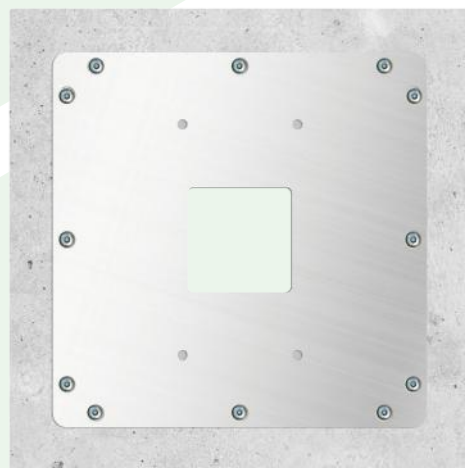
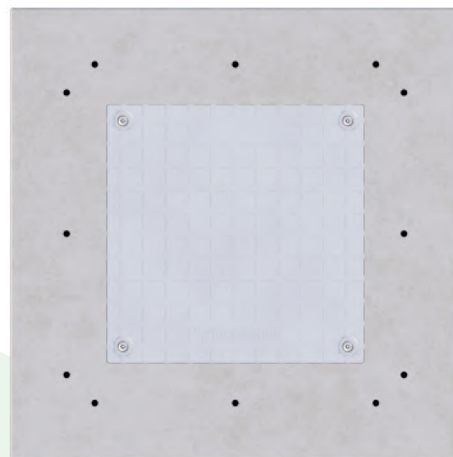




EV BLOCKS.COM



COMPLEO CITO 500


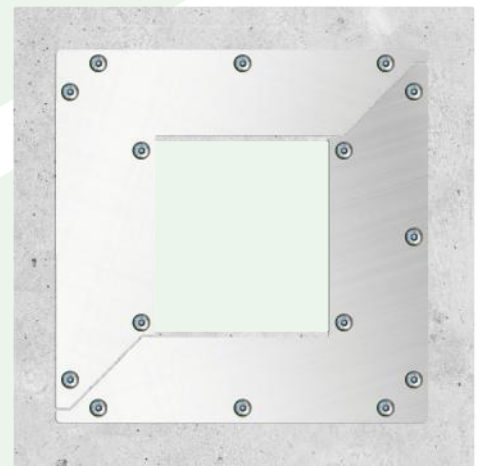
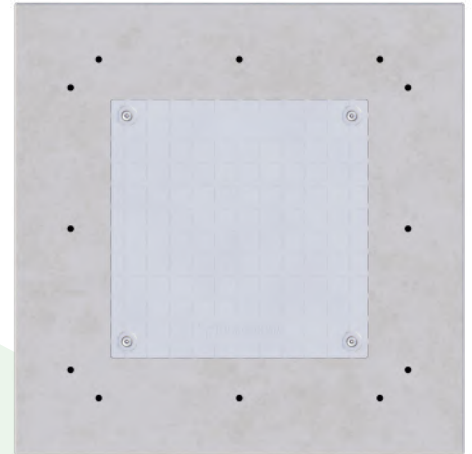




EV BLOCKS.COM

 **PHIHONG**
PHIHONG

PHIHONG DS90

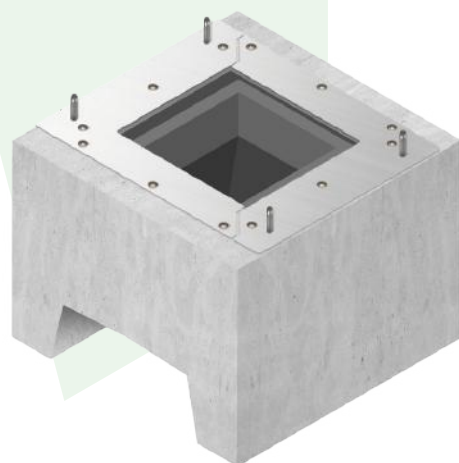
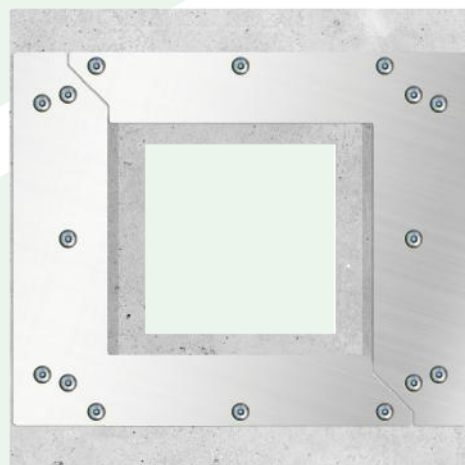
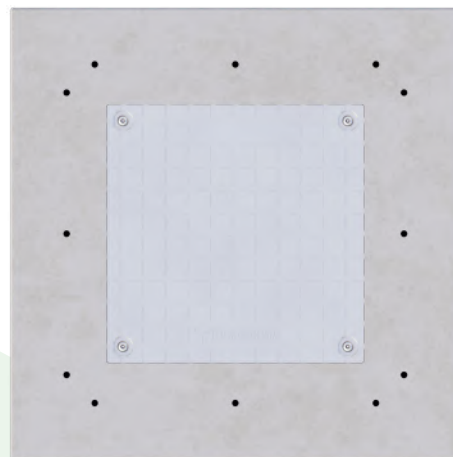




EV BLOCKS.COM

EKO SMART ENERGY SYSTEMS
ENERGETYKA

EKO ENERGETYKA AXON EASY 240, 320 AND 400

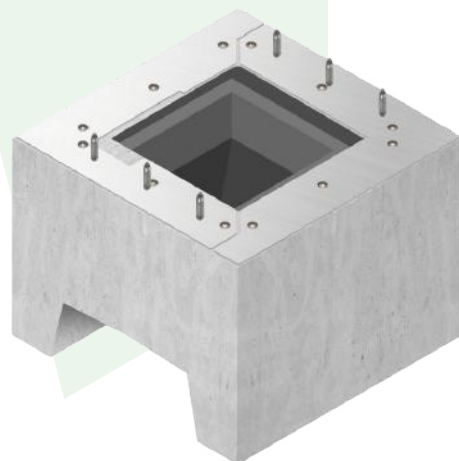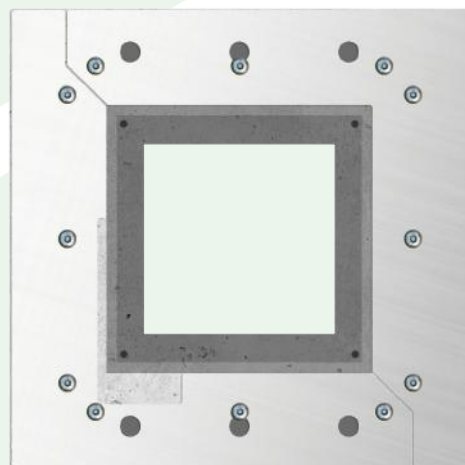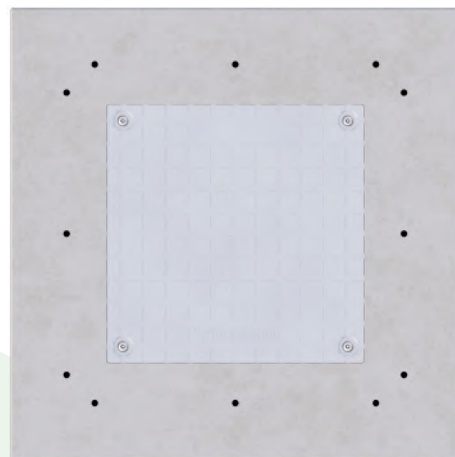






EV BLOCKS.COM



Star Charge®

STARCHARGE TITAN V3

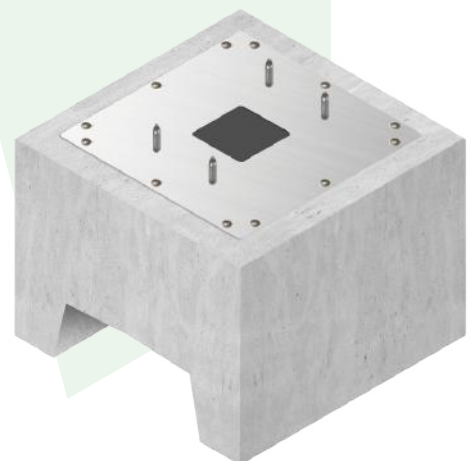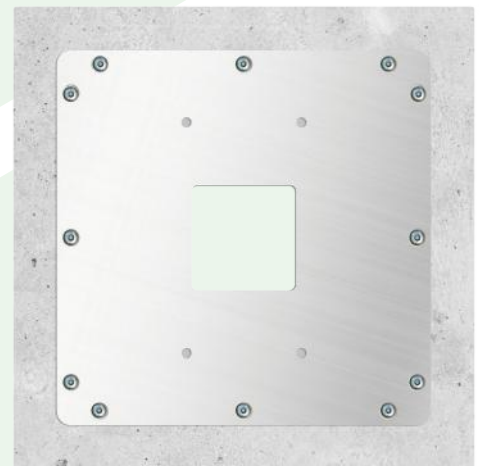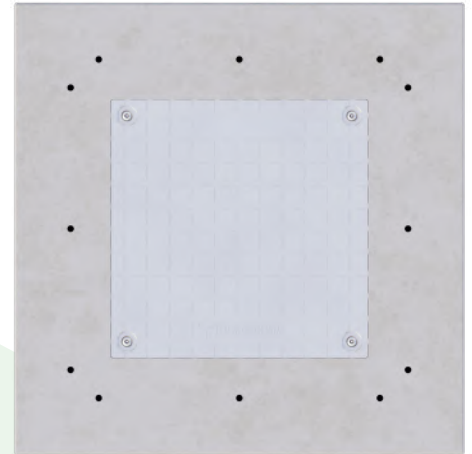



EV BLOCKS
23 METRO CENTRE
WELBECK WAY
PETERBOROUGH
PE2 7UH

ENGINEERED TO SAVE YOU TIME AND MONEY