




ITEM:	QUANTITY:	SPECIFICATION:
CONCRETE BLOCK	1	MIN. 4,000 PSI @ 28 DAYS , APPROX. WEIGHT = 1,750 LBS
STAINLESS MATCH PLATE	1	CUSTOM ½" THICK MATCH PLATE, SPECIFIC TO DC CHARGER
COVER PLATE*	1	COMPOSITE MATERIAL, ANSI TIER 15 RATED, SLIP RESISTANT SURFACE
EMBEDDED ANCHORS	16	½" x 2 ½" PLASTIC NC THREADED INSERT
COVER PLATE SCREWS*	4	½"-13 x 3" STAINLESS STEEL, TAMPER RESISTANT, BUTTON HEAD
MATCH PLATE SCREWS	12	½"-13 x 2.5" STAINLESS STEEL, HEX, FLAT HEAD
COVER PLATE WASHERS*	4	½" STAINLESS STEEL
*NOTE: COVER PLATE IS REQUIRED FOR PASSIVE INSTALLATION, BUT OPTIONAL FOR ACTIVE INSTALLATION		

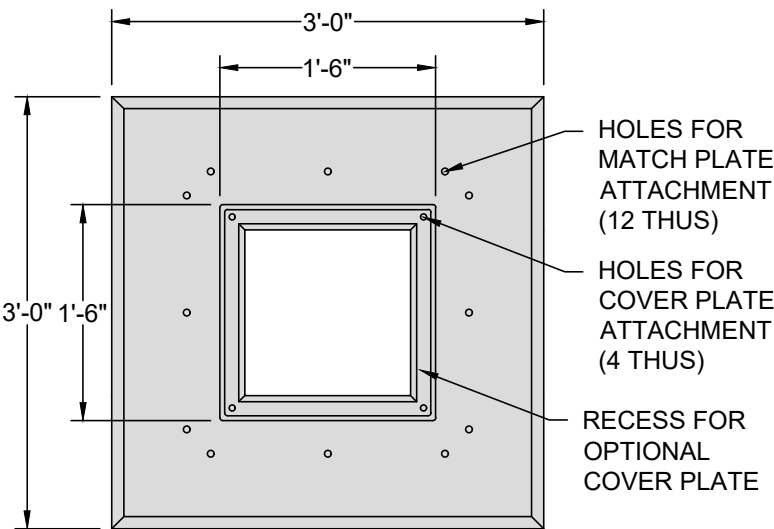


PRODUCT TOP VIEW
3/4" = 1'-0"

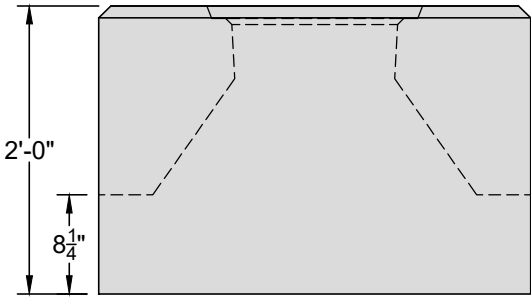

PRODUCT SIDE VIEW
3/4" = 1'-0"

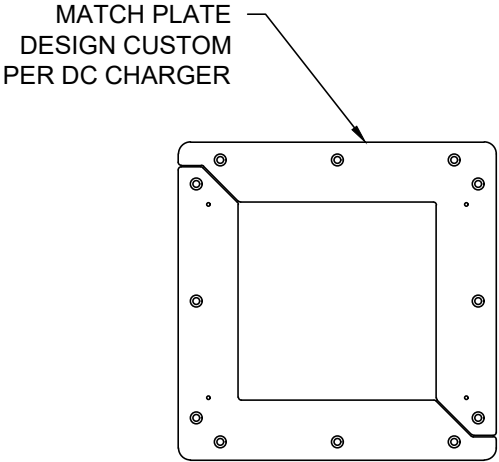

SAMPLE MATCH PLATE
3/4" = 1'-0"

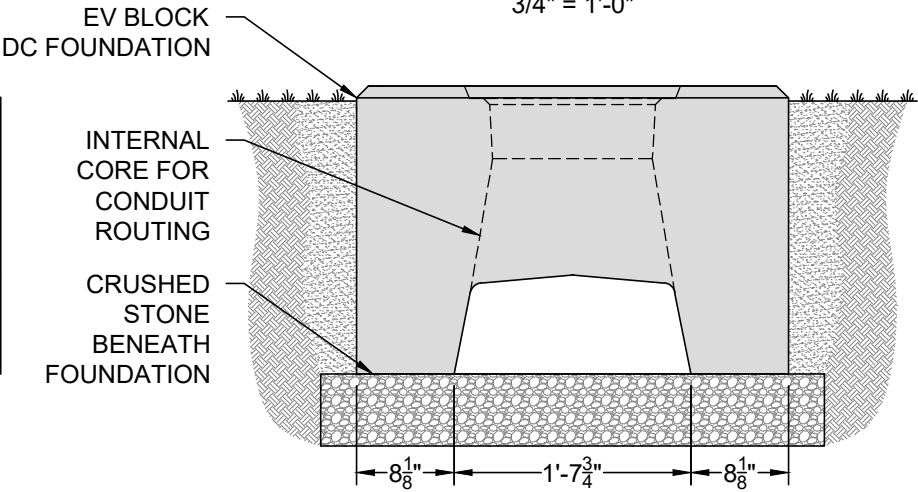

PRODUCT INSTALL VIEW
3/4" = 1'-0"

Disclaimer: This drawing has been prepared by EV Blocks, Ltd. and to the best of its knowledge, accurately represents the product use in the application that it is illustrated. Anyone making use of this drawing does so at their own risk and assumes all liability for such use. Final design for construction purposes must be completed by a Registered Professional Engineer who is familiar with the product and who has taken into account specific site conditions.



EV BLOCK DC FOUNDATION PRODUCT TYP DETAIL

EV BLOCKS - NORTH AMERICA
612.474.0089
evblocks.com/us

© Copyright 2026 EV Blocks, Ltd. All Rights Reserved