


ITEM:	QUANTITY:	SPECIFICATION:
CONCRETE BLOCK	1	MIN. 4,000 PSI @ 28 DAYS, APPROX. WT = 650 LBS
ADAPTER PLATE	1	COMPOSITE MATERIAL, ANSI TIER 15 RATED, SLIP RESISTANT SURFACE
EMBEDDED ANCHORS	4	$\frac{1}{2}$ " x 2 $\frac{1}{2}$ " PLASTIC NC THREADED INSERT
SECURING BOLTS	4	$\frac{1}{2}$ "-13 x 3" STAINLESS STEEL 304, TAMPER RESISTANT, BUTTON HEAD
WASHERS	4	$\frac{1}{2}$ " STAINLESS STEEL 304
THROUGH-BOLT HARDWARE	--	FOR CHARGER CONNECTION, BY OTHERS


INSTALLATION NOTE:

EV BLOCKS SHALL BE INSTALLED PER THE CURRENT VERSION OF THE EV BLOCK INSTALLATION MANUAL AND PRODUCT SPECIFICATION.

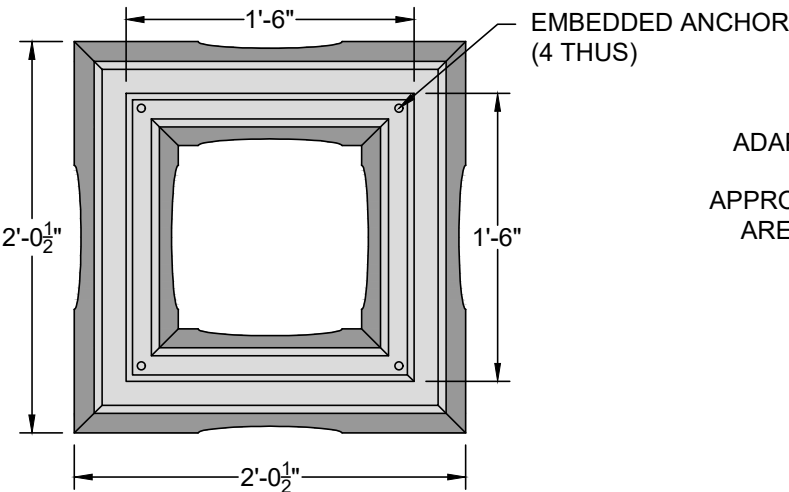


PRODUCT TOP VIEW

1" = 1'-0"

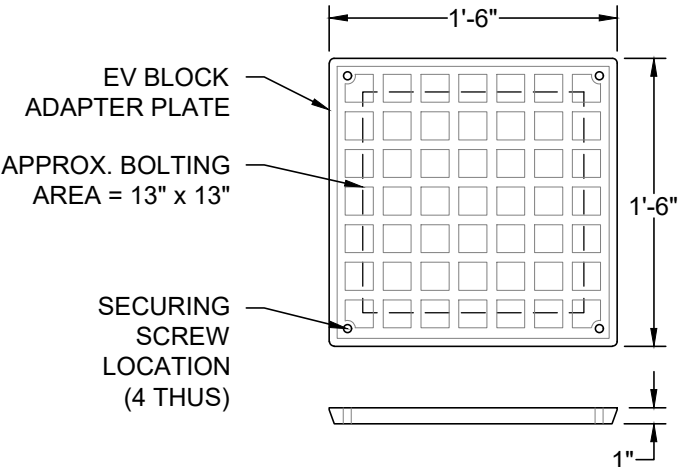


ADAPTER PLATE VIEW

1" = 1'-0"

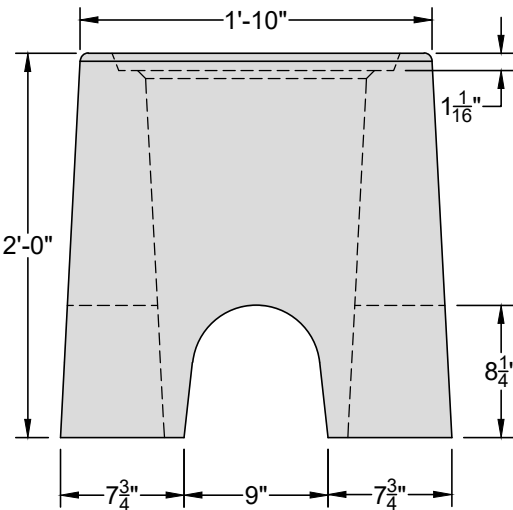

PRODUCT SECTION VIEW


1" = 1'-0"

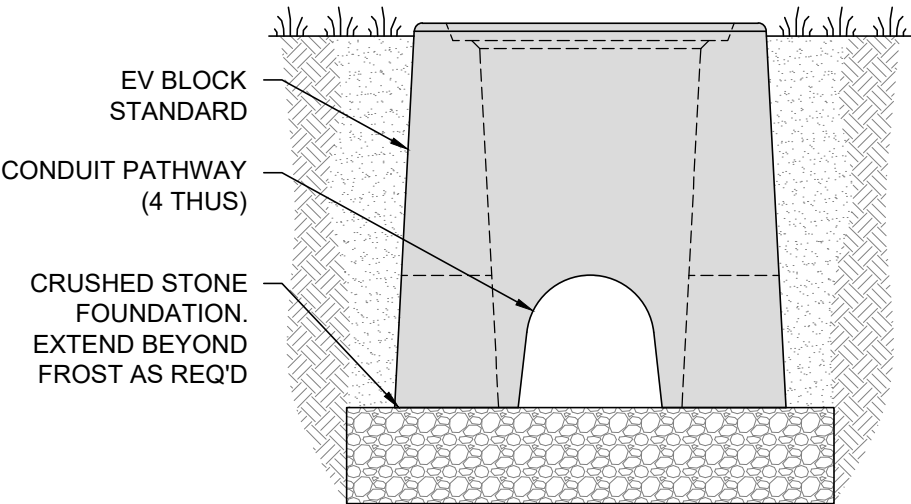

INSTALLED PRODUCT VIEW

1" = 1'-0"

Disclaimer: This drawing has been prepared by EV Blocks, Ltd. and to the best of its knowledge, accurately represents the product use in the application that it is illustrated. Anyone making use of this drawing does so at their own risk and assumes all liability for such use. Final design for construction purposes must be completed by a Registered Professional Engineer who is familiar with the product and who has taken into account specific site conditions.



EV BLOCKS.COM

EV BLOCK STANDARD
TYPICAL DETAIL

EV BLOCKS - NORTH AMERICA
612.474.0089
evblocks.com/us

© Copyright 2026 EV Blocks, Ltd. All Rights Reserved